


240XE M Flush Grid

CHAINS > CHAIN-BELTS

Our commitment to excellence drives us to continuously improve the performance and longevity of our chains. We are excited to announce our latest innovation: the 240 XE - Extra Efficiency series. We've meticulously enhanced the weight-to-PV ratio, shedding weight without compromising on strength. This innovation translates to unmatched pressure and speed resistance, even when navigating tight turns of up to 180 degrees. We've also expanded the contact surface and lateral sliding area by a substantial 12%, ensuring more precise and effective control even for delicate or unstable products like all types of petaloid. From a logistical perspective, the reduction in weight - a remarkable 1200 kg less over 2000 m in medium to large lines - streamlines handling during assembly and maintenance. This translates to a host of benefits, including improved operator comfort, reduced noise, friction, and dust levels. The result? A substantial 10-15% reduction in transportation costs and significantly longer component life. The 240 XE - Extra Efficiency series represents a significant step forward in belt/chain performance, offering increased efficiency, durability, and logistical savings.

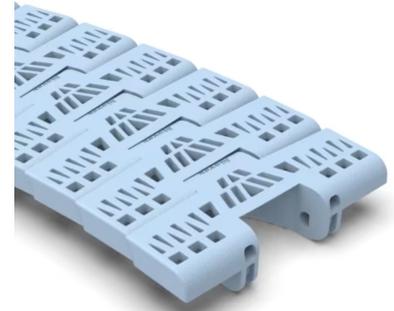

Sideflexing Chain-Belt LFA 240XE M K 330 FG

Article-Nr: P12050103

Technical features

Series	240XE-260-261
Pitch	25.4 mm
Thickness	8.7 mm
Surface Type	FG - Flush Grid
Functionality	Side Flex MAGNETIC
Unit of measure	Meter
Width:	K 330 - 83,8 mm

Material:	LFA - Low Friction Acetal (01)
Part:	P1205
Back flex radius:	130 mm
Sideflexing radius min:	500 mm
Mass:	1.02 kg/m
Pin material:	Ferritic Stainless Steel
Box:	10 ft - 3,048 m
Max working load:	1800 N
Supplementary informations:	Interchangeable with 260M series and competitor alternatives.

