

# 550 Ultimate Top System

## MODULAR BELTS

Movex is excited to unveil the 550 Ultimate Top System a novel fusion of flush grid and flat top modular belts. This innovative design was crafted to optimize sliding performance across various conveyed products such as PET, CAN, and GLASS, accommodating their distinct sliding surfaces. Key advantages of this new design include enhanced self-cleaning and drainage capabilities, streamlined inventory management, reduced installation and maintenance challenges, energy savings of up to 18%, and extended wear life. Pairing the 550 UTS with our high-performance PFX-extra PBT material positions this design as the prime option for dry-running applications. It's ideally suited for in-liners, out-liners, and pressure-less combiners. If you don't know yet our new 550 UTS and you're looking to boost your line layout and operational efficiency with a versatile all-in-one belt, now is the perfect moment to reach out for more details.





## Modular Belt LFA 550 UTS W 85mm (2 Pos)

Article-Nr: [P5502010085C](#)


## Technical features

<b>Series</b>	550
<b>Pitch</b>	25.4 mm
<b>Thickness</b>	8.7 mm
<b>Increments</b>	85 mm
<b>Surface Type</b>	FT - Flat Top
<b>Surface Type</b>	FG - Flush Grid
<b>Functionality</b>	Straight
<b>Unit of measure</b>	Meter
<b>Width:</b>	85 mm (3,35")

<b>Material:</b>	LFA - Low friction acetal (01)
<b>Version:</b>	C - 2 Positioners
<b>Part:</b>	P5502
<b>Back flex radius:</b>	25 mm
<b>Max working load:</b>	30000 N/m
<b>Mass:</b>	7 kg/m <sup>2</sup>
<b>Temperature range dry:</b>	-40÷80 °C
<b>Temperature range wet:</b>	-40÷65 °C
<b>Pin material:</b>	PBT white
<b>Fixation:</b>	Patented PinSphere
<b>Box:</b>	10 ft - 3,048 m
<b>Supplementary informations:</b>	Open Surface 25 %

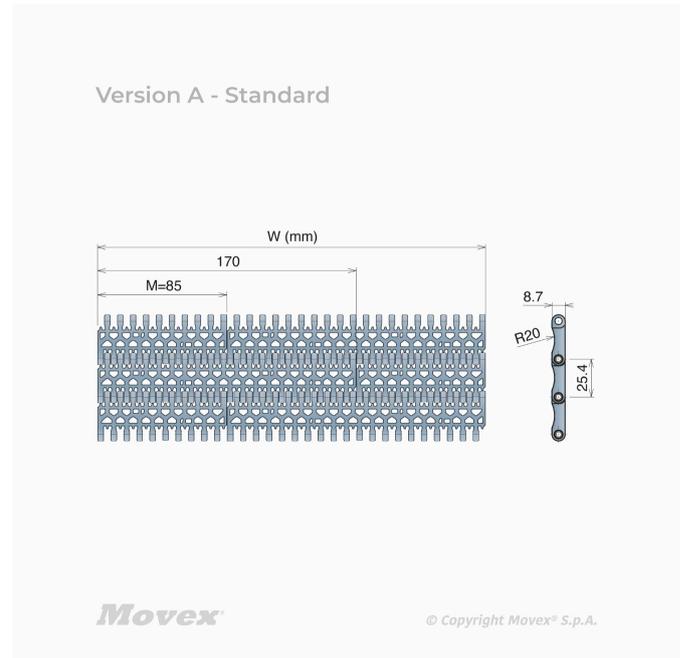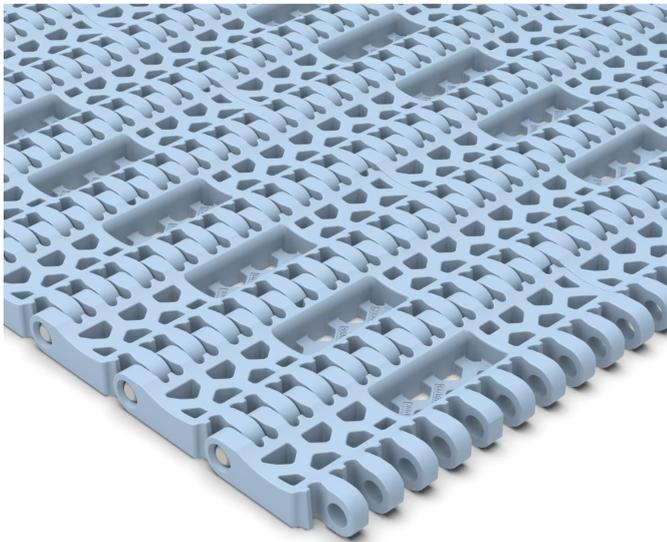


Version B - With 1 Positioner



**Movex**

© Copyright Movex® S.p.A.

Version C - With 2 Positioner

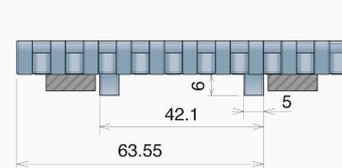

**Movex**

© Copyright Movex® S.p.A.